

## LiteBeam<sup>®</sup> AC GEN2

airMAX<sup>®</sup> ac CPE with Dedicated Management Radio

Model: LBE-5AC-Gen2, LBE-5AC-LR

Lightweight, Low-Cost Solution

Full Adjustment Flexibility

Quick Assembly and Installation





# UNMS App

The LiteBeam 5AC Gen 2 integrates a separate Wi-Fi radio for fast and easy setup using your mobile device.

## Accessing airOS via Wi-Fi


The UNMS™ app provides instant accessibility to the airOS configuration interface and can be downloaded from the App Store (iOS) or Google Play™ (Android). UNMS allows you to set up, configure, and manage the LiteBeam 5AC Gen 2. It offers the following options once you're connected or logged in to the device:

**Status** Check link status information or the basic configuration settings of the LiteBeam 5AC Gen 2.

**Configuration** Change or update the existing configuration of the LiteBeam 5AC Gen 2.

**Tools** Access tools for initial installation and configuration of the LiteBeam 5AC Gen 2.

**Actions** Back up or update the configuration, upload new firmware, reboot the device, reset the device to factory defaults, access the airOS UI in the web browser, or disconnect from the LiteBeam 5AC Gen 2.

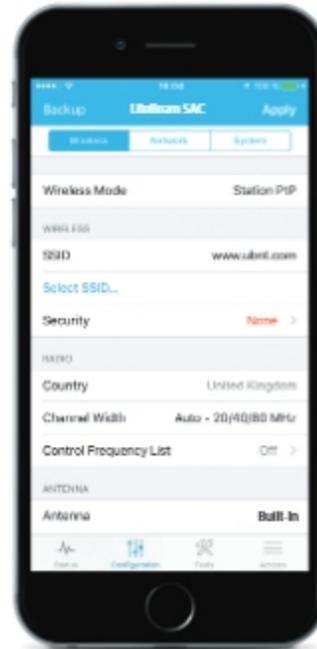

## Models

The LiteBeam 5AC Gen 2 offers quick and easy alignment and enhanced protection against power surges. There are two models available:

### LiteBeam® AC GEN2

#### Model: LBE-5AC-Gen2

The LBE-5AC-Gen2 features a robust mount with separate azimuth and elevation adjustments.



### LiteBeam® AC LR

#### Model: LBE-5AC-LR

Designed for long-range applications, the LBE-5AC-LR features a larger reflector size and elevation adjustment (azimuth is adjusted by rotation around the pole).







# Specifications

LBE-5AC-Gen2		
Dimensions	358 x 271.95 x 272.5 mm (14.09 x 10.71 x 10.73")	
Weight	800 g (1.76 lb)	
Without Mount	980 g (2.16 lb)	
Power Supply	24V, 0.3A Gigabit PoE Adapter (Included)	
Max. Power Consumption	7W	
Power Method	Passive PoE (Pairs 4, 5+; 7, 8 Return)	
Supported Voltage Range	24V ± 10%	
Gain	23 dBi	
Networking Interface	(1) 10/100/1000 Ethernet Port	
Processor Specs	MIPS 74Kc	
Memory	64 MB DDR2	
LEDs	Power, Ethernet	
Channel Sizes	PtP Mode	PtMP Mode
	10/20/30/40/50/60/80 MHz	10/20/30/40 MHz
Enclosure Characteristics	Reflector (SGCC 0.6T) / Plastic: PC	
Mounting	Pole-Mounting Kit (Included)	
Wind Loading	275 N @ 200 km/h (61.8 lbf @ 125 mph)	
Wind Survivability	200 km/h (125 mph)	
ESD/EMP Protection	± 24 kV Contact / Air	
Operating Temperature	-40 to 70° C (-40 to 158° F)	
Operating Humidity	5 to 95% Noncondensing	
Certifications	CE, FCC, IC	

Operating Frequency (MHz)				
Worldwide	5150 - 5875			
US/CA	U-NII-1: 5150 - 5250	U-NII-2A: 5250 - 5350 MHz	U-NII-2C: 5470 - 5725 MHz	U-NII-3: 5725 - 5850

Management Radio (MHz)	
Worldwide	2412 - 2472
US/CA	2412 - 2462

LBE-5AC-Gen2 Output Power: 25 dBm							
TX Power Specifications				RX Power Specifications			
Modulation	Data Rate	Avg. TX	Tolerance	Modulation	Data Rate	Sensitivity	Tolerance
airMAXac	1x BPSK (1/2)	25 dBm	± 2 dB	airMAXac	1x BPSK (1/2)	-96 dBm Min.	± 2 dB
	2x QPSK (1/2)	25 dBm	± 2 dB		2x QPSK (1/2)	-95 dBm	± 2 dB
	2x QPSK (3/4)	25 dBm	± 2 dB		2x QPSK (3/4)	-92 dBm	± 2 dB
	4x 16QAM (1/2)	25 dBm	± 2 dB		4x 16QAM (1/2)	-90 dBm	± 2 dB
	4x 16QAM (3/4)	25 dBm	± 2 dB		4x 16QAM (3/4)	-86 dBm	± 2 dB
	6x 64QAM (3/4)	25 dBm	± 2 dB		6x 64QAM (3/4)	-83 dBm	± 2 dB
	6x 64QAM (5/8)	24 dBm	± 2 dB		6x 64QAM (5/8)	-77 dBm	± 2 dB
	6x 64QAM (7/8)	23 dBm	± 2 dB		6x 64QAM (7/8)	-74 dBm	± 2 dB
	8x 256QAM (5/8)	21 dBm	± 2 dB		8x 256QAM (5/8)	-69 dBm	± 2 dB
	8x 256QAM (7/8)	21 dBm	± 2 dB		8x 256QAM (7/8)	-65 dBm	± 2 dB

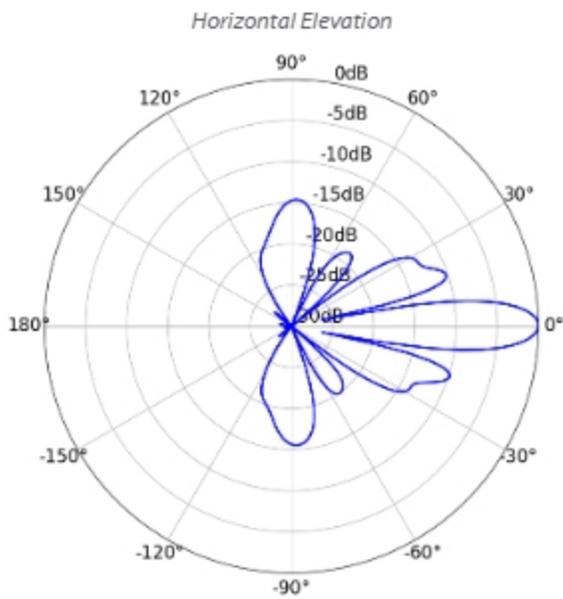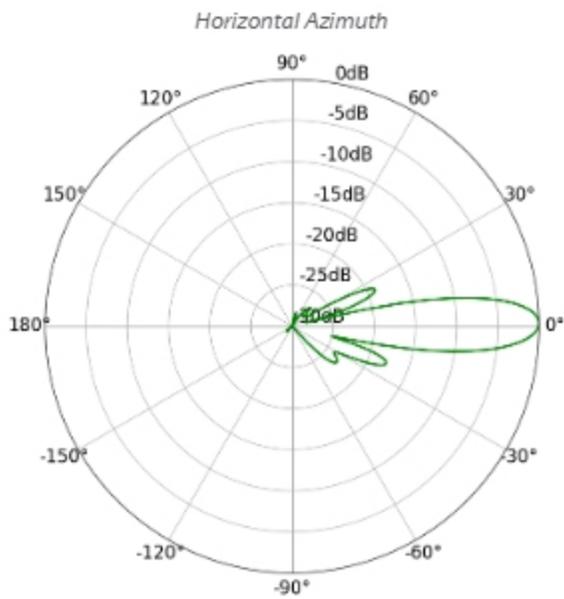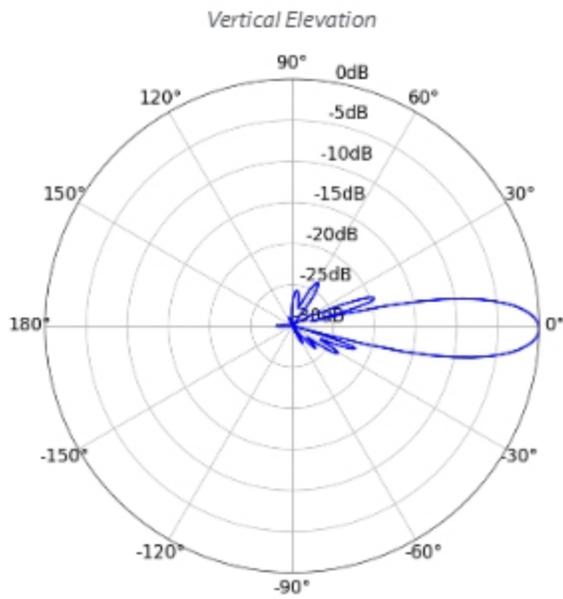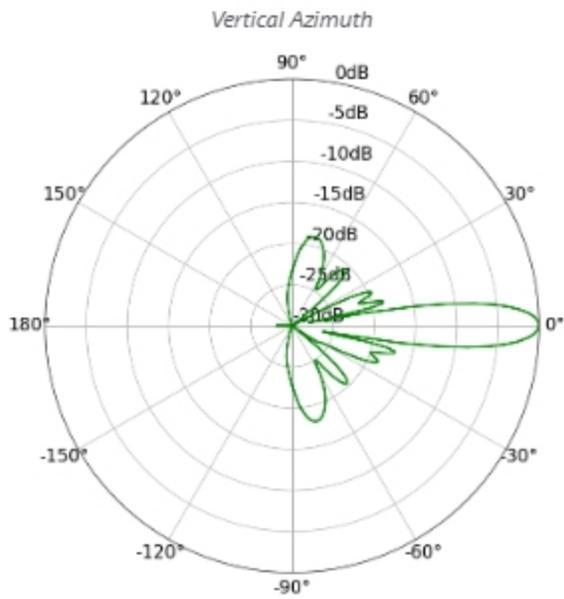





# Specifications

LBE-5AC-LR		
Dimensions	512.5 x 385.75 x 258.3 mm (20.18 x 15.19 x 10.17")	
Weight	1.360 kg (2.998 lb)	
Without Mount	1.735 kg (3.825 lb)	
With Mount		
Power Supply	24V, 0.3A Gigabit PoE Adapter (Included)	
Max. Power Consumption	7W	
Power Method	Passive PoE (Pairs 4, 5+; 7, 8 Return)	
Supported Voltage Range	24V ± 10%	
Gain	26 dBi	
Networking Interface	(1) 10/100/1000 Ethernet Port	
Processor Specs	MIPS 74Kc	
Memory	64 MB DDR2	
LEDs	Power, Ethernet	
Channel Sizes	PtP Mode	PtMP Mode
	10/20/30/40/50/60/80 MHz	10/20/30/40 MHz
Enclosure Characteristics	Reflector (Aluminum) / Plastic: PC	
Mounting	Pole-Mounting Kit (Included)	
Wind Loading	550 N @ 200 km/h (123.6 lbf @ 125 mph)	
Wind Survivability	200 km/h (125 mph)	
ESD/EMP Protection	± 24 kV Contact / Air	
Operating Temperature	-40 to 70° C (-40 to 158° F)	
Operating Humidity	5 to 95% Noncondensing	
Certifications	CE, FCC, IC	

Operating Frequency (MHz)				
Worldwide	5150 - 5875			
US/CA	U-NII-1: 5150 - 5250	U-NII-2A: 5250 - 5350 MHz	U-NII-2C: 5470 - 5725 MHz	U-NII-3: 5725 - 5850

Management Radio (MHz)	
Worldwide	2412 - 2472
US/CA	2412 - 2462

LBE-5AC-LR Output Power: 25 dBm							
TX Power Specifications				RX Power Specifications			
Modulation	Data Rate	Avg. TX	Tolerance	Modulation	Data Rate	Sensitivity	Tolerance
airMAXac	1x BPSK (1/2)	25 dBm	± 2 dB	airMAXac	1x BPSK (1/2)	-96 dBm Min.	± 2 dB
	2x QPSK (1/2)	25 dBm	± 2 dB		2x QPSK (1/2)	-95 dBm	± 2 dB
	2x QPSK (3/4)	25 dBm	± 2 dB		2x QPSK (3/4)	-92 dBm	± 2 dB
	4x 16QAM (1/2)	25 dBm	± 2 dB		4x 16QAM (1/2)	-90 dBm	± 2 dB
	4x 16QAM (3/4)	25 dBm	± 2 dB		4x 16QAM (3/4)	-86 dBm	± 2 dB
	6x 64QAM (3/4)	25 dBm	± 2 dB		6x 64QAM (3/4)	-83 dBm	± 2 dB
	6x 64QAM (5/8)	24 dBm	± 2 dB		6x 64QAM (5/8)	-77 dBm	± 2 dB
	6x 64QAM (7/8)	23 dBm	± 2 dB		6x 64QAM (7/8)	-74 dBm	± 2 dB
	8x 256QAM (5/8)	21 dBm	± 2 dB		8x 256QAM (5/8)	-69 dBm	± 2 dB
8x 256QAM (7/8)	21 dBm	± 2 dB	8x 256QAM (7/8)	-65 dBm	± 2 dB		

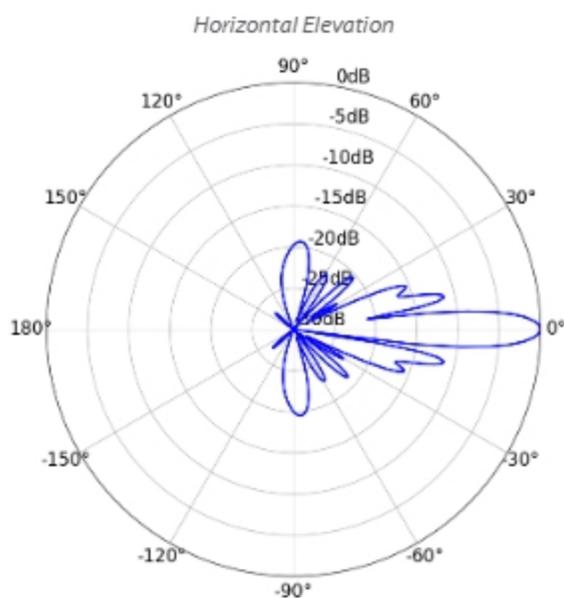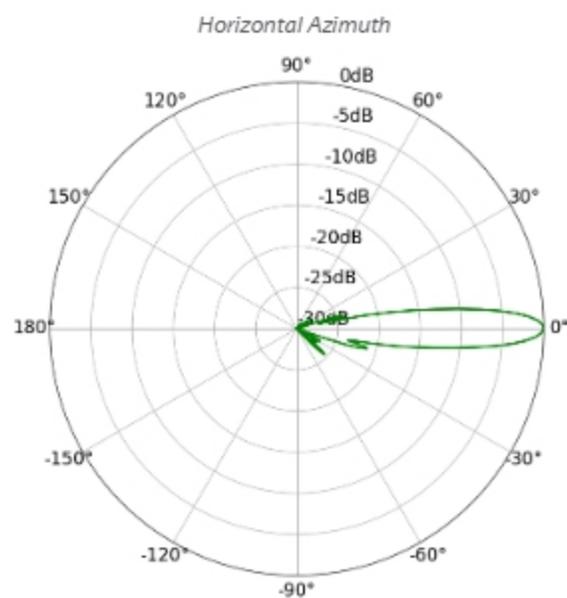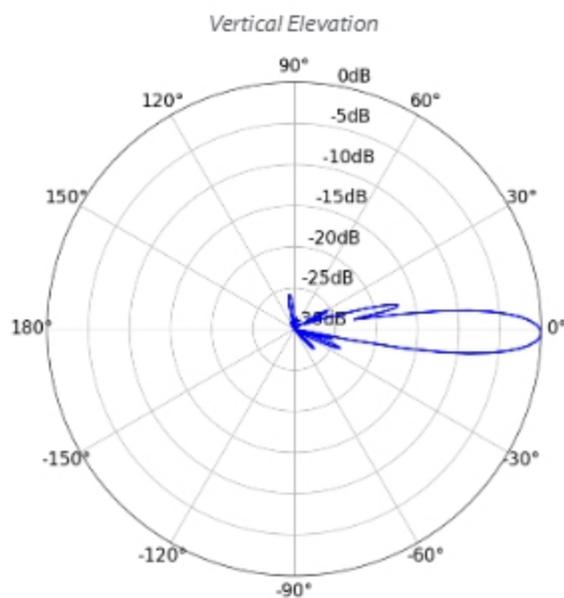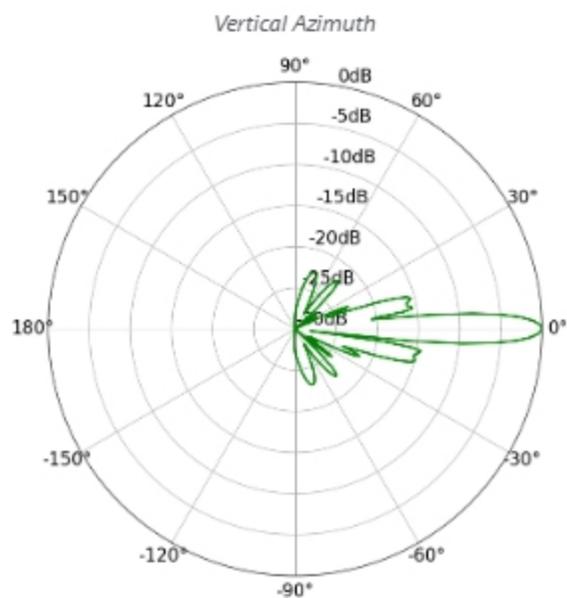

Specifications are subject to change. Ubiquiti products are sold with a limited warranty described at: [www.ubnt.com/support/warranty](http://www.ubnt.com/support/warranty)

The limited warranty requires the use of arbitration to resolve disputes on an individual basis, and, where applicable, specify arbitration instead of jury trials or class actions.

©2017-2019 Ubiquiti Networks, Inc. All rights reserved. Ubiquiti, Ubiquiti Networks, the Ubiquiti U logo, the Ubiquiti beam logo, airMAX, airOS, airMagic, InnerFeed, LiteBeam, and UNMS are trademarks or registered trademarks of Ubiquiti Networks, Inc. in the United States and in other countries. All other trademarks are the property of their respective owners.