

## *air***MAX**® YAGI Antenna

900 MHz 2x2 MIMO High-Gain Antenna

Model: AMY-9M16

Ultimate in RF Performance

---

Easily Integrates with Rocket® M900 (sold separately)

---

Incredible Range and Speed

## Overview

The airMAX® 900 MHz Yagi Antenna is a high-gain array antenna designed to seamlessly integrate with the RocketM900 radio (sold separately). It features incredible range performance of up to 20+ km and speeds of 90+ Mbps.

On the right is one example of how the airMAX Yagi Antenna can be deployed for directional coverage in Point-to-Point (PtP) bridging and a Point-to-MultiPoint (PtMP) network.

### 2x2 Dual-Polarity Design

The airMAX Yagi Antenna is a high-gain array antenna that delivers high performance in the 900 MHz radio band.

### Long-Range Deployments

The airMAX Yagi Antenna performs at ultra-long ranges in Non-Line-of-Sight (NLoS) applications.

### Durable Construction

The airMAX Yagi Antenna features a robust mechanical design for outdoor application use.


### Plug and Play Integration

The airMAX Yagi Antenna has a built-in Rocket mount, so installation requires no special tools. Snap the Rocket securely into place and mount the antenna; you then have the optimal combination of RocketM900 radio and airMAX Yagi Antenna for your application.

Pair the RocketM900 radio with the airMAX Yagi Antenna to create a powerful basestation. This combination gives network architects unparalleled flexibility and convenience.


## Application Example

### PtP and PtMP Links

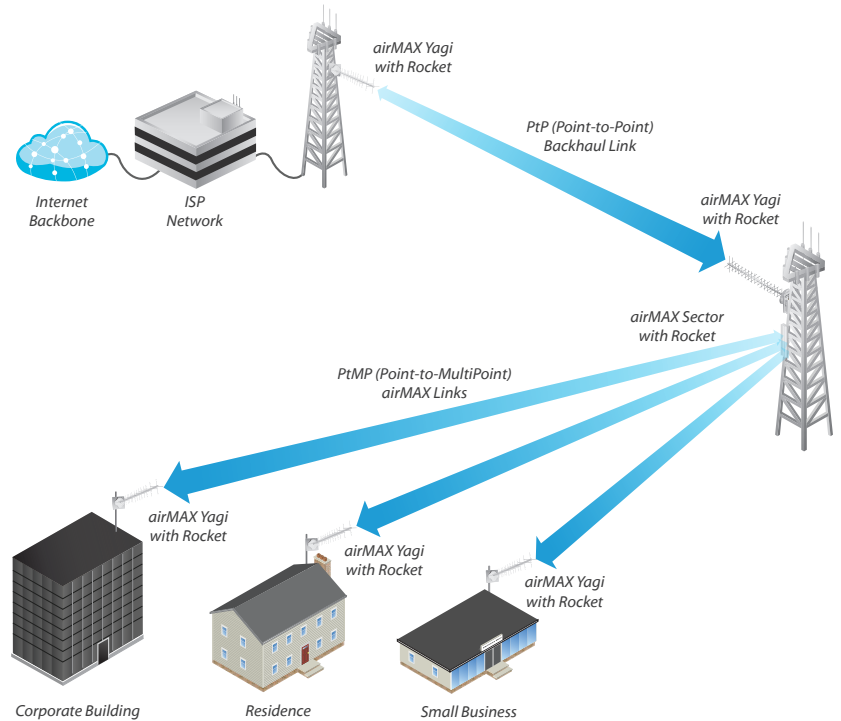

*The combination of the airMAX Yagi Antenna and a RocketM900 radio provides directional coverage that utilizes airMAX technology to provide carrier-class performance and power.*

### Rocket Radio with Yagi Antenna

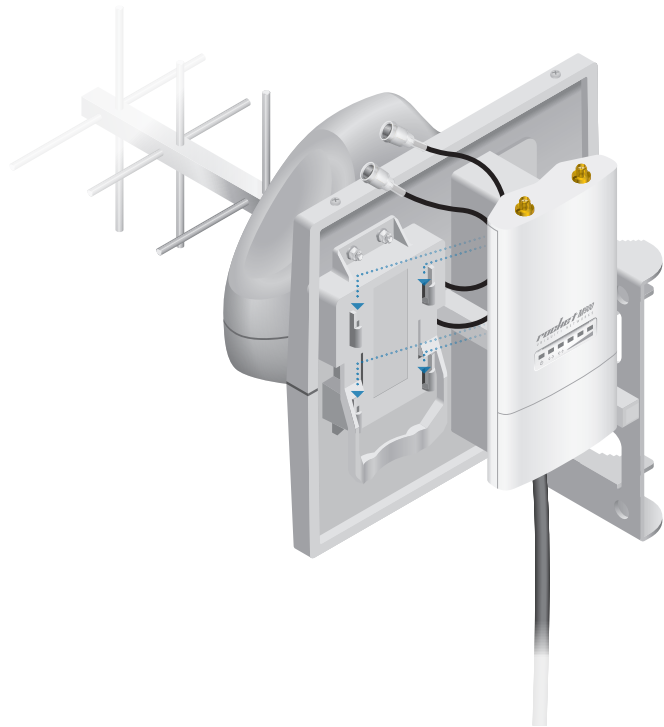


*The RocketM900 snaps into the built-in Rocket mount with ease.*

# Model Details


The airMAX Yagi Antenna, model AMY-9M16, is a high-gain antenna ideal for directional coverage in PtP or PtMP applications.

Available in a two-pack, it offers a 2x2 dual-polarity design so you get optimal performance from the RocketM900 radio: up to 90+ Mbps throughput in either Line-of-Sight (LoS) or Non-Line-of-Sight (NLoS) applications

- **Frequency range** The airMAX Yagi Antenna uses the 902 - 928 MHz radio band.
- **Antenna gain** The gain is 16 dBi in both polarizations.
- **Compatibility** The airMAX Yagi Antenna integrates with the RocketM900 radio.
- **Pole-Mounting** Two U-bolts securely mount the airMAX Yagi Antenna on a pole.

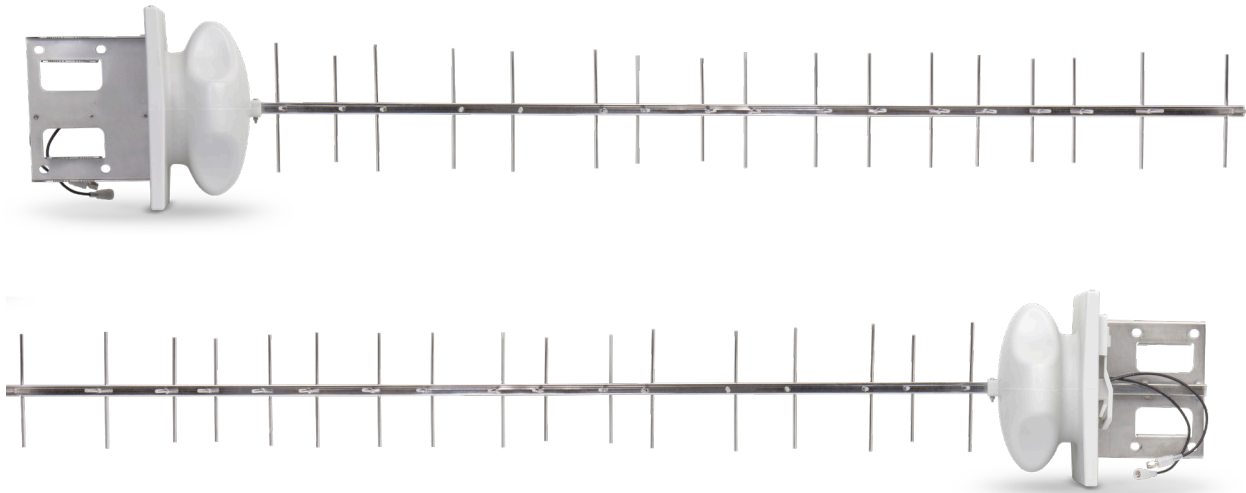

The airMAX Yagi Antenna is available as a two-pack.

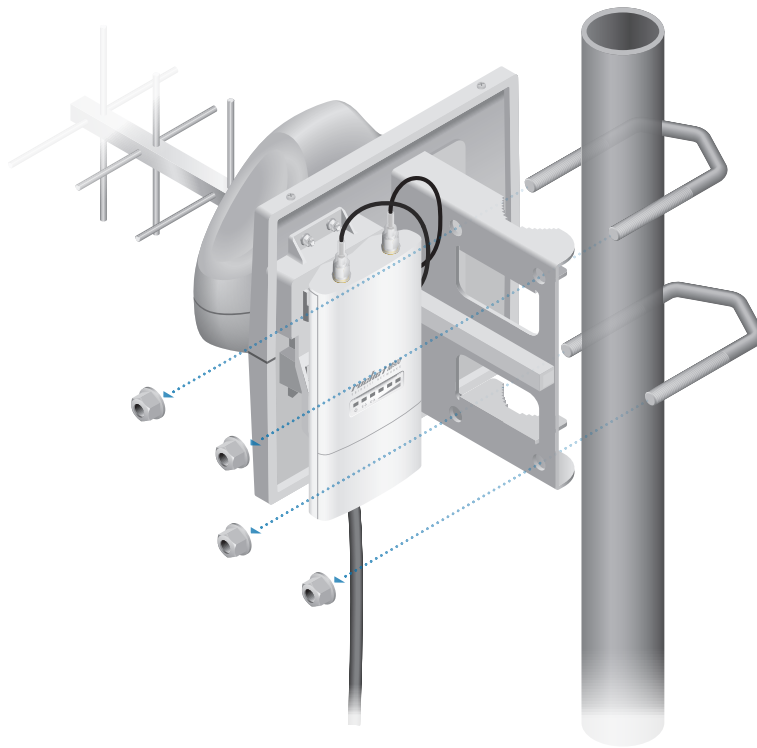


Use two U-bolts to mount the airMAX Yagi Antenna on a pole.

# Specifications


AMY-9M16	
Dimensions	1365 x 215 x 218 mm (53.74 x 8.47 x 8.58")
Weight (Mount Included)	2.5 kg (5.51 lb)
Frequency Range	902 - 928 MHz
Gain	16 dBi, Both Polarizations
HPOL Beamwidth	29 to 34°
VPOL Beamwidth	29 to 34°
F/B Ratio	20 dB
Max. VSWR	< 1.5:1 Over Band
Wind Survivability	200 km/h (125 mph)
Wind Loading	102.3 N @ 200 km/h (23 lbf @ 125 mph)
Polarization	Dual-Linear
Cross-Polarization Isolation	20 dB
ETSI Specification	EN 302 326 DN2
Mounting	M8 U-Bolt Pole Mounting Kit, Rocket Bracket, and Weatherproof RF Connectors Included




Vertical Azimuth

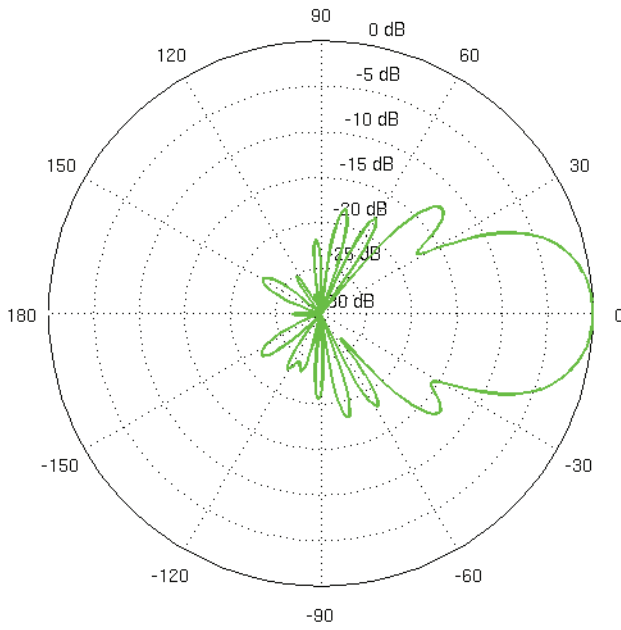


Vertical Elevation

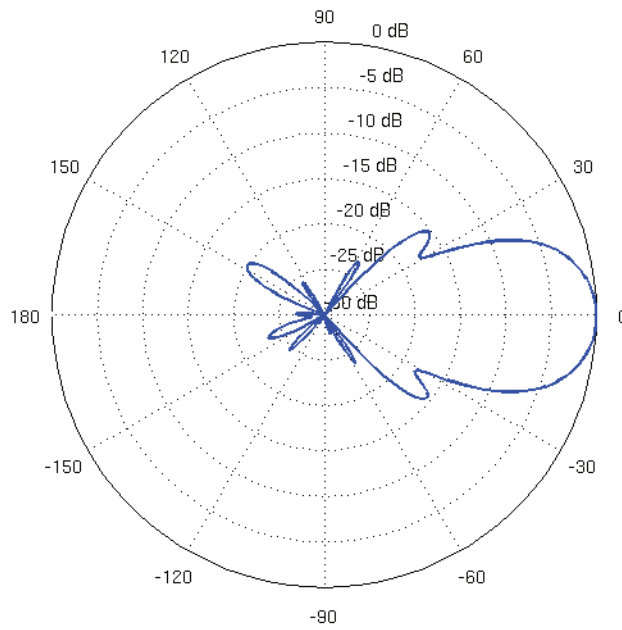

Horizontal Azimuth

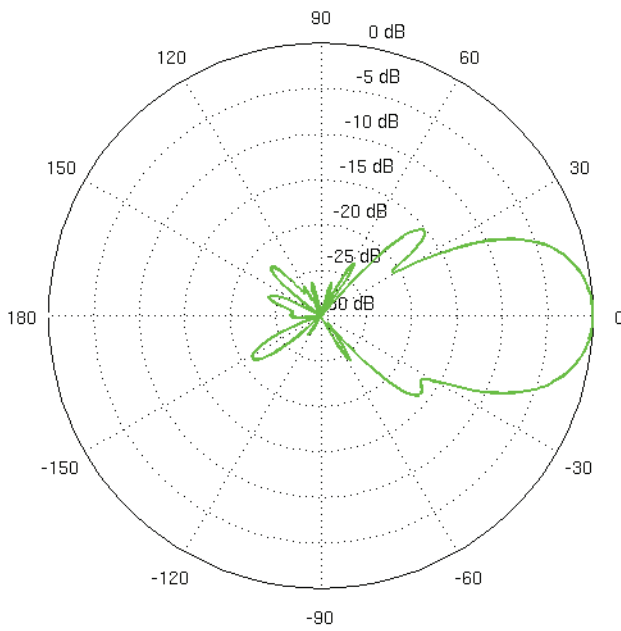

Horizontal Elevation

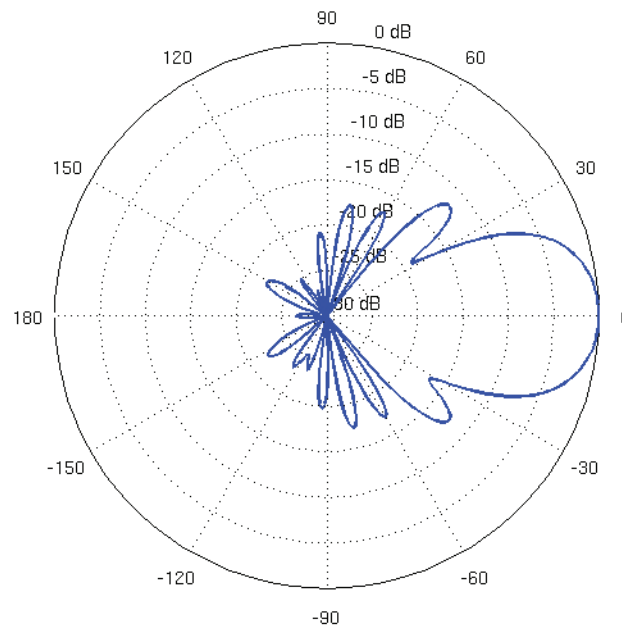

Specifications are subject to change. Ubiquiti products are sold with a limited warranty described at: [www.ubnt.com/support/warranty](http://www.ubnt.com/support/warranty)  
 ©2012-2018 Ubiquiti Networks, Inc. All rights reserved. Ubiquiti, Ubiquiti Networks, the Ubiquiti U logo, the Ubiquiti beam logo, airMAX, airOS, and Rocket are trademarks or registered trademarks of Ubiquiti Networks, Inc. in the United States and in other countries. All other trademarks are the property of their respective owners.