


🔍 Search UniFi products

- UniFi Cloud Gateways
- Switching
- WiFi
- Camera Security
- Door Access
- CloudKeys & Gateways
- Power Tech
- Integrations
- Accessories

Flagship > U7 Lite

- Datasheet
- In The Box
- Marketing Images
- Installation Guide

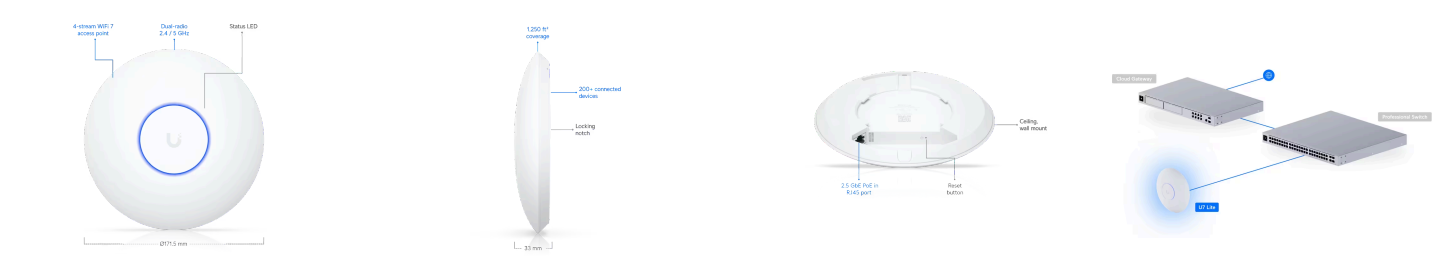

Overview

Dimensions	Ø171.5 x 33 mm (Ø6.8 x 1.3")
WiFi Standard	WiFi 7
Spatial Streams	4
Coverage Area	115 m² (1,250 ft²)
Max. Client Count	200+
Uplink	2.5 GbE
Mounting Locations	Ceiling, wall
Mounting Plate	Plastic mounting plate (Included)
Power Method	PoE

Performance

MIMO	
5 GHz	2 x 2 (DL/UL MU-MIMO)
2.4 GHz	2 x 2 (DL/UL MU-MIMO)
Max. Data Rate	
5 GHz	4.3 Gbps (BW240)
2.4 GHz	688 Mbps (BW40)
Antenna Gain	
5 GHz	5 dBi
2.4 GHz	4 dBi
Max. TX Power	
5 GHz	24 dBm
2.4 GHz	23 dBm

Max. BSSIDs	8 per Radio
Supported Data Rates	
└ 802.11be (WiFi 7)	7.3 Mbps to 4.3 Gbps (MCS0 - MCS13 NSS1/2, EHT 20/40/80/160/240)
└ 802.11ax (WiFi 6)	7.3 Mbps to 2.4 Gbps (MCS0 - MCS11 NSS1/2, HE 20/40/80/160)
└ 802.11ac (WiFi 5)	6.5 Mbps to 1.7Gbps (MCS0 - MCS9 NSS1/2, VHT 20/40/80/160)
└ 802.11n	6.5 Mbps to 300 Mbps (MCS0 - MCS15, HT 20/40)
Features	
Wireless Meshing	✓
Band Steering	✓
802.11v BSS Transition Management	✓
802.11r Fast Roaming	✓
802.11k Radio Resource Management (RRM)	✓
Advanced Radio Management	✓
Passpoint (Hotspot 2.0)	✓
Captive Hotspot Portal	
└ Custom Branding Landing Page	✓
└ Voucher Authentication	✓
└ Payment-Based Authentication	✓
└ External Portal Server Support	✓
└ Password Authentication	✓
└ Guest Network Isolation	✓
Private Pre-Shared Key (PPSK)	✓
WiFi Speed Limiting	✓
Client Device Isolation	✓
WiFi Schedules	✓
RADIUS over TLS (RadSec)	✓
Dynamic RADIUS-assigned VLAN	✓
Hardware	
Max. Power Consumption	13W
Supported Voltage Range	42.5—57V DC
Networking Interface	(1) 2.5 GbE RJ45 port
Weight	313 g (11 oz)
Management	Ethernet
Enclosure Material	UV-stabilized polycarbonate
Mount Material	UV-stabilized polycarbonate, galvanized steel (SGCC)
LEDs	
└ System	White/Blue
Channel Bandwidth	HT 20/40, VHT 20/40/80/160, HE 20/40/80/160, EHT 20/40/80/160/240 (MHz)

Certifications	CE, FCC, IC
Ambient Operating Temperature	-30 to 40° C (-22 to 104° F)
Ambient Operating Humidity	5 to 95% noncondensing


^ **Software**

Application Requirements

UniFi Network	Version 9.0.114 and later
UniFi OS	iOS™ version 10.20.2 and later Android™ version 10.21.7 and later

Stay in Touch

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2025 Ubiquiti, Inc. All rights reserved.