Cloud Gateways   Switching   WiFi   Camera Security   Door Access   Integrations   Advanced Hosting   Accessories

Network Storage > UNAS 2

UNAS 2
UNAS-2

Datasheet   In The Box   Marketing Images   Installation Guide

Overview

Dimensions	135 x 129 x 223.7 mm (5.3 x 5.1 x 8.8")
Storage Capacity	(2) 3.5" drive bays
Networking Interface	(1) 2.5 GbE RJ45 (2.5G/1G/100M/10M)
Expansion Port	(1) 5 Gbps USB-C
Form Factor	Desktop

Hardware

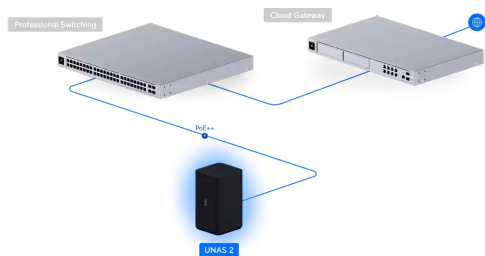|	
Hard Drive Capacity	(2) 3.5" HDD support
Max. Power Budget for Drives	52W
Max. Power Consumption	60W
Power Method	PoE++
Power Supply	60W PoE++ adapter (Included)
Processor	Quad-Core ARM® Cortex®-A55 at 1.7 GHz
Memory	4 GB
Management	Ethernet
RF Interface	Bluetooth 4.1
Display	1.47" color LCM
Weight	1.3 kg (2.85 lb)
Enclosure Material	Polycarbonate
LEDs	
System	✓
Ambient Operating Temperature	-5 to 40° C (23 to 104° F)
Ambient Operating Humidity	10 to 90% noncondensing
NDAA Compliant	✓
Certifications	FCC, CE, IC

Software

Application Requirements

(2) 3.5" HDD drive bays

135 mm

2.5 GbE RJ45 PoE++ input · 129 mm

UniFi Drive · Version 3.1.7 and later

Mobile App · iOS™ version 10.28.0 and later
Android™ version 10.28.3 and later

Professional Switching

Cloud Gateway

PoE++

UNAS 2

Company

Blog

Case Studies

Careers

Trust Center

Contact Us

Investors

Compliance

Training

Courses

Calendar

Trainers

Become a Trainer

Buy Now

Ubiquiti Store

Find a Distributor

Become a Distributor

Tools

WiFiman

UISP

UniFi Design Center

UISP Design Center

Downloads

Stay in Touch

Email

Subscribe