



Flex 2.5G

Specifications:

Dimensions	212.9 x 76 x 33.5 mm
------------	----------------------

Port Layout:

2.5 GbE RJ45	8
10 GbE RJ45	1
10G SFP+	1
Form Factor	Compact Desktop, wall, DIN, magnetic

Performance:

Switching Capacity	60 Gbps
Total Non-Blocking Throughput	30 Gbps
Forwarding Rate	45 Mpps
Supported VLANs	256
MAC Address Table Size	4,000

Layer 2 Features:

STP & RSTP	Yes
Egress Rate Limit	Yes
Flow Control, Storm Control	Yes
Multicast & Broadcast Rate Limiting	Yes
Port Isolation	Yes
Port Mirroring	Yes
Jumbo Frames	Yes
Loop Protection	Yes

Hardware:

Max. Power Consumption	14W with PoE input, 14W with AC adapter input
Power Method	(1) USB Type-C, 5V DC, 3A, (1) PoE+ In
Power Input Method	USB Input, PoE
Power Supply	AC/DC, external, 15W
Supported Voltage Range	4.8—5.2V DC/USB, 44V—57V PoE In
Management	Ethernet
Weight	395 g
Enclosure / Mount Material	Polycarbonate
Ambient Operating Temperature	-20°C to 45 °C
Ambient Operating Humidity	10 to 90% non condensing
Certifications	CE, FCC, IC




Datasheet

Software:

Application Requirements

UniFi Network

Version 9.0.114 and later

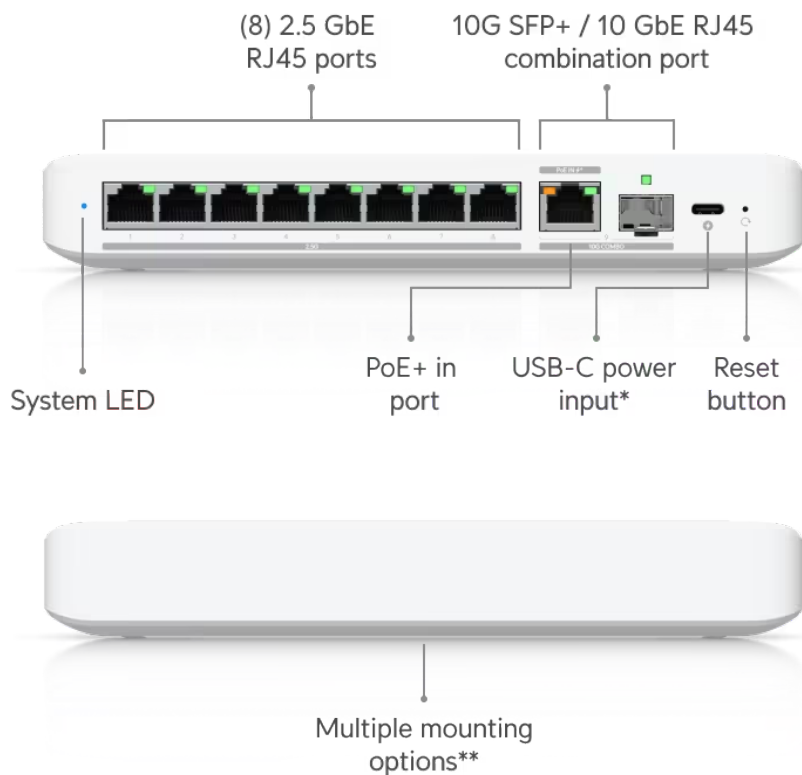

*Optional powering with included 5V DC, 3A USB-C adapter.

**Wall-mountable (kit included), DIN rail-mountable (sold separately).